

Bulletin: AB0309-3-N-639

SUBJECT: Abex VL23 Product Information



ABEX VL 23 GF

PRODUCT PROFILE

- FMSI: 4311GD, 4311JD, 4515CD, 4515ED, 4707D, 4709D
- FMVSS 121 rated at 23,000 lbs. (180 AL Factor)
- Good stopping power
- Smooth braking at all pressures
- Even wear across all temperature ranges
- Low swell and growth



TYPICAL PHYSICAL PROPERTIES

- Gogan Hardness 24
- Specific Gravity 1.78
- Flexural Strength 5000

TYPICAL FRICTION PROPERTIES

- Normal Friction .46 G
- Hot Friction .43 F

FMVSS 121 BRAKE STANDARD - Typical Inertia Dynamometer Plot
Test Parameters: Brake - Dana 16.5 x 7 ES2; Axle Load - 23,000 lbs.; AL Factor - 180;
Rolling Radius - 19.6 inches; Drum Weight – 110.21 lbs.

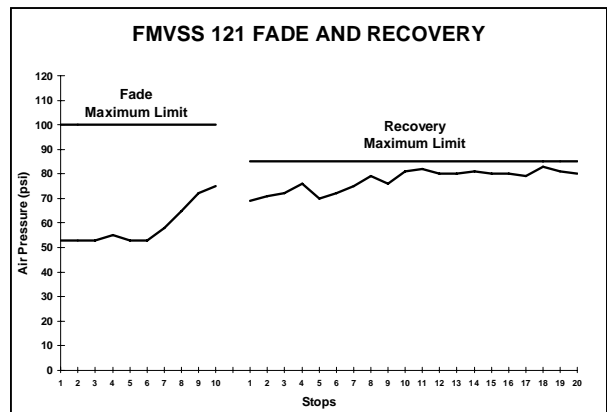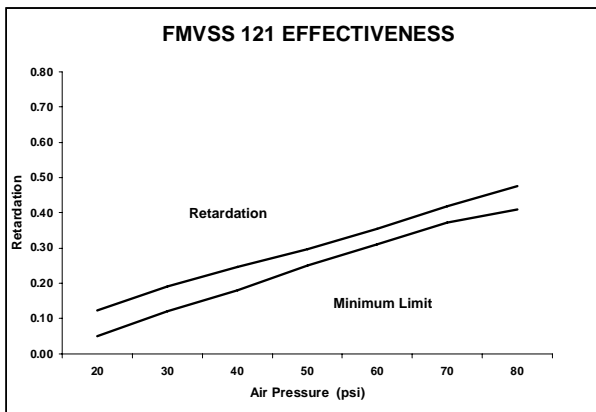

***Preferred By An Industry
That Demands The Best***

The information presented on this data sheet is based upon the research and experience of Federal-Mogul and is accurate to the best of its knowledge. Since Federal-Mogul has no control over the conditions under which its products may be employed, results cannot be guaranteed and Federal-Mogul assumes no liability whatsoever for possible damage or injury whether or not caused by foregoing suggestions on this data sheet.