



Abex[®]
EX


**FMVSS 121 BRAKE STANDARD
Typical Dynamometer Plot**

Test Parameters:

- Brake - Meritor 16.5 x 7 Q Plus
- Axle Load - 23,000 lbs.
- AL Factor - 165
- Rolling Radius - 20.8 inches
- Drum Weight - 117.4 lbs.
- Test Number - 99061

**Preferred by an industry
that demands the best.**

Abex[®] 685 FF is a high performance, OEM approved brake lining with superior stopping power and exceptional block life under all conditions.

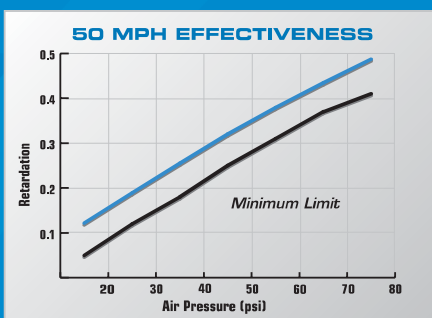

FMVSS 121 rated 23,000 lbs.


165 AL Factor (30 x 5.5)

OEM Approved

Low swell and growth

**Exceptional flexural strength
(6000 lbs/sq in)**

**Superior modulus of elasticity
(1.233 million lbs/sq in)**

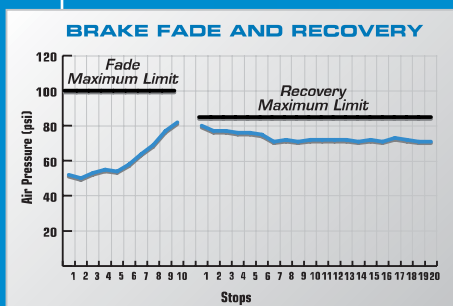

**RP628 - 23K 40 psi
Brake Torque 67,101**

Abex[®]
COMMERCIAL GRADE FRICTION™






















685 FF

PRODUCT PROFILE

- Asbestos-free brake lining
- FMVSS 121 rated for 23,000 lbs. (165 AL Factor)
- OEM approved and RP628 registered
- Manufactured in QS 9000 certified plants
- Excellent fade, recovery and retardation
- Excellent lining life and drum compatibility
- Superior flexural strength and modulus of elasticity to resist cracking
- Superior stopping power

APPLICATIONS

Recommended for use on S-cam brakes

 TANDEM TRACTOR/TRAILER	 SPREAD TANDEM	 MULTIPLE TRAILER	 SINGLE TRACTOR/TRAILER	 STRAIGHT TRUCK
 CONTAINER CHASSIS	 LIVESTOCK TRAILER	 CAR HAULER	 DRY BULK	 TANKER
 FLAT BED TRAILER	 VAN TRAILER	 LOGGING TRAILER	 SINGLE AXLE DUMP	 TANDEM AXLE DUMP
 REFUSE TRUCK	 TANDEM AXLE MIXER	 SCHOOL BUS	 FIRE TRUCK	

TYPICAL PHYSICAL PROPERTIES

Gogan Hardness	35 GC
Specific Gravity	1.92
Flexural Strength	6000 lbs/sq in



TYPICAL FRICTION PROPERTIES

Normal Friction	.440 F
Hot Friction	.435 F
400° F Wear Friction	.431

Advanced Friction Solutions • Specified By OEMs • Preferred By Fleets

Premium 23K

685 FF VS. THE COMPETITION

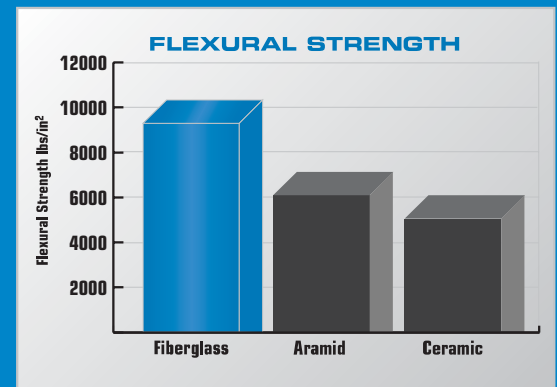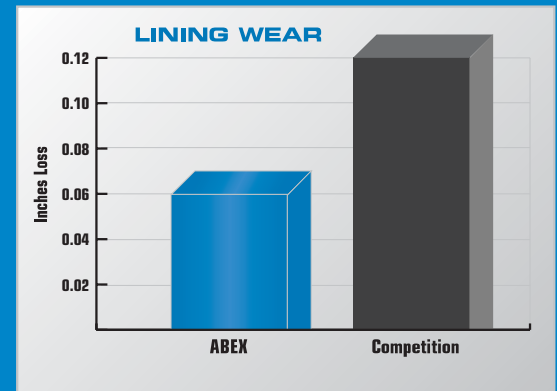

Abex® linings' high fiberglass content gives them superior flexural strength. Fiberglass has 50% more flexural strength than other brake lining fibers.

Distributed by:

The information presented on this data sheet is based upon the research and experience of Federal-Mogul and is accurate to the best of its knowledge. Since Federal-Mogul has no control over the conditions under which its products may be employed, results cannot be guaranteed and Federal-Mogul assumes no liability whatsoever for possible damage or injury whether or not caused by the foregoing suggestions on this data sheet.



©2005 Federal-Mogul Corporation. All rights reserved. Form# 25755

